


Wagon is RIV approved for mainland Europe with the exception of Spain, Portugal and Finland.

2 sliding hoods per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level but also loading/unloading from top by crane.


Wagon has been designed for an even distribution of load on the wagon floor.

The maximum wheel pressure on the floor board is 3 tonnes.

Winches are also fitted to enable tensioned strap security.

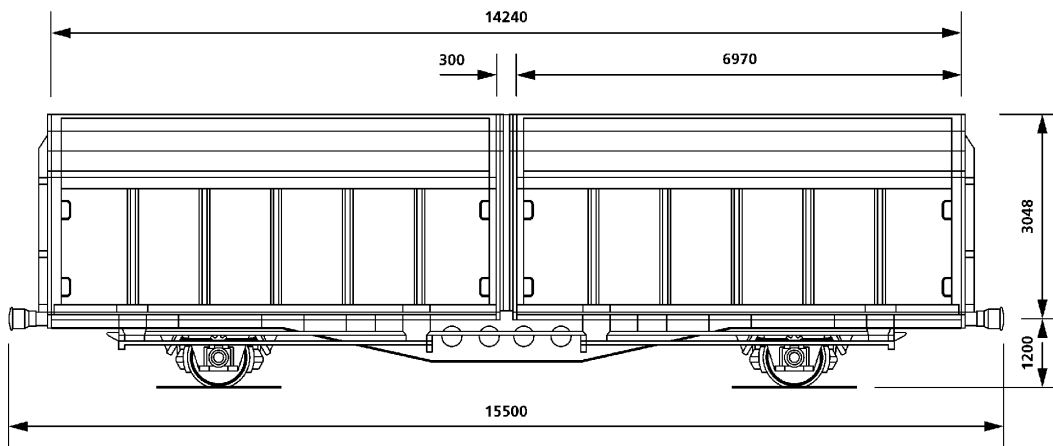

Wagon Data

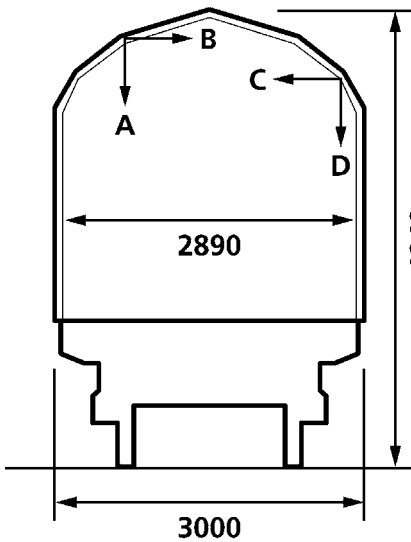

Overall length (over buffers)	15.500mm
Overall height	4.248mm
Loading length	14.240mm
Loading width	2.890mm
Loading area	41m2
Loading capacity	111m3
Platform height	1.200mm
Sliding hood aperture	6.970mm
Tare weight	15.600 kgs
Payload (axle load 22.5 tonnes) ca.	29.000 kgs
Minimum curve	75 metres
Maximum speed	100 kph

Refer to separate table for height and width dimensions

Payload	A	B	C	D	
S	16	20	25	29	**
120	0.00				

GE101
Lis

Measurements in wall area (A – B)	
Height above wagon floor (mm)	Loading width (mm)
2.031	2.890
2.050	2.872
2.100	2.824
2.150	2.777
2.200	2.730
2.250	2.682
2.300	2.635
2.350	2.587
2.363	2.575
2.400	2.507
2.450	2.415
2.500	2.323
2.550	2.230
2.600	2.138
2.650	2.046
2.700	1.954
2.733	1.893
2.750	1.779
2.800	1.444
1.850	1.110
2.900	776
2.950	441
3.000	107
3.016	0

Measurements in roof support area (C – D)	
Height above wagon floor (mm)	Loading width (mm)
1.942	2.860
1.950	2.852
2.000	2.806
2.050	2.760
2.100	2.714
2.150	2.668
2.200	2.622
2.250	2.576
2.300	2.530
2.337	2.496
2.350	2.465
2.400	2.345
2.450	2.226
2.500	2.106
2.550	1.987
2.600	1.867
2.648	1.753
2.650	1.736
2.700	1.322
2.750	908
2.800	495

GE101

Lis