


Wagon is RIV approved for mainland Europe with the exception of Spain, Portugal and Finland.

4 sliding walls per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level.


Wagon has been designed for an even distribution of load on the wagon floor.

The maximum wheel pressure on the floor board is 5 tonnes.

The wagon is fitted with fixing points along both sides for loading security puposes.

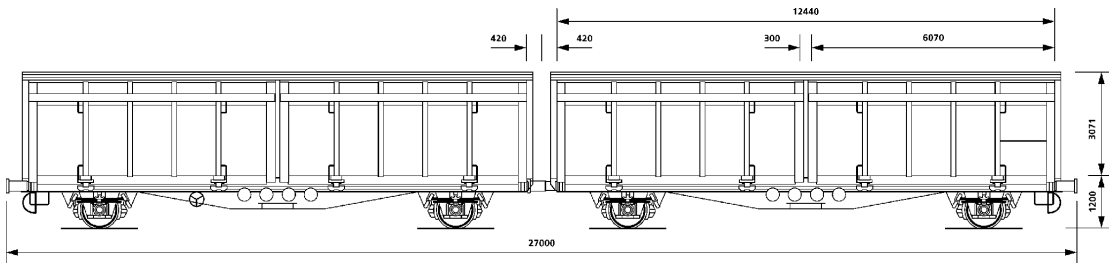

Wagon Data

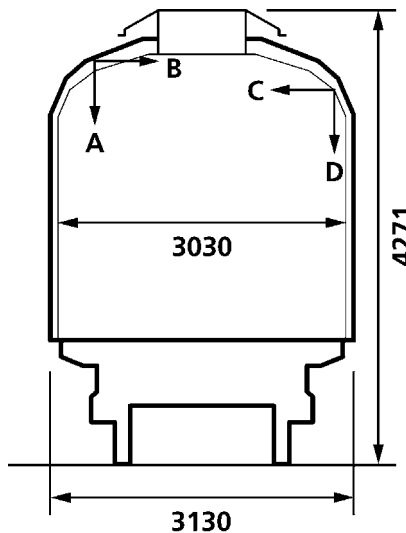

Overall length (over buffers)	27.000mm
Overall height	4.271mm
Loading length x 2 (Type A)	12.540mm
Loading length x 2 (Type B)	12.440mm
Loading width	3.030mm
Loading area	75m2
Loading capacity	205m3
Length of door openings (4 per wagon side)	6.070mm
Height of door openings	2.800mm
Platform height	1.200mm
Tare weight	28.500 kgs
Payload (axle load 22.5 tonnes) ca.	61.500 kgs
Minimum curve	75 metres
Maximum speed	100 kph

Refer to separate table for height and width dimensions

Payload	A	B	C	D	
S	35.5	43.5	53.5	61.5	**
120	0.00				

GE108


Hirrs 5

Measurements in wall area (A – B)	
Height above wagon floor (mm)	Loading width (mm)
2.000	3.030
2.031	3.030
2.050	3.012
2.100	2.964
2.150	2.916
2.200	2.870
2.250	2.822
2.300	2.774
2.350	2.728
2.363	2.715
2.400	2.648
2.450	2.556
2.500	2.464
2.541	2.388
2.550	2.338
2.600	2.064
2.650	1.788
2.700	1.514
2.750	1.240
2.800	964


Measurements in roof support area (C – D)	
Height above wagon floor (mm)	Loading width (mm)
1.961	3.030
2.000	2.992
2.050	2.946
2.100	2.898
2.150	2.850
2.200	2.804
2.250	2.756
2.300	2.708
2.346	2.665
2.350	2.656
2.400	2.523
2.450	2.390
2.481	2.308
2.500	2.204
2.550	1.928
2.600	1.654
2.650	1.380
2.700	1.104
2.750	828
2.755	800
2.800	800

Hirrs 5

70 (800x1200)

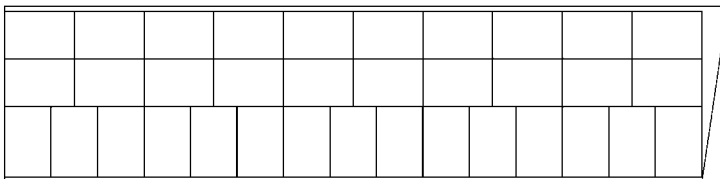

60 Pallets (1000x1200)

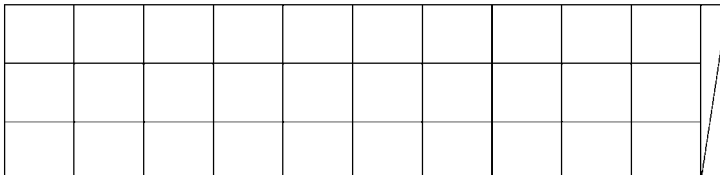

GE108

Hirrs 5