



Wagon is RIV approved for mainland Europe and UK channel traffic, with the exception of Spain, Portugal and Finland.

3 sliding walls per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level.

Wagon has been designed for an even distribution of load on the wagon floor.

The maximum wheel pressure on the floor board is 2.2 tonnes.

The wagon is fitted with fixing points along both sides for loading security puposes.

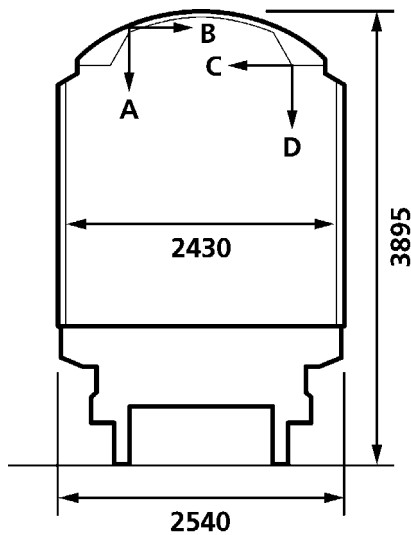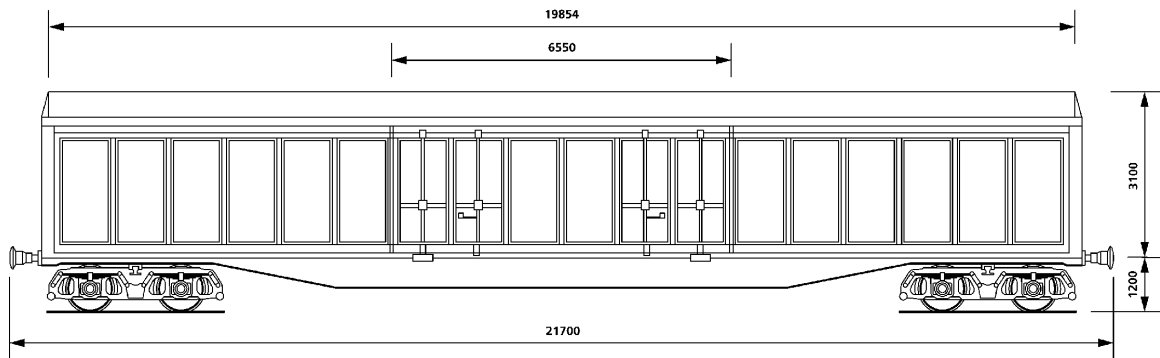

Refer to separate table for height and width dimensions

Wagon Data

Overall length (over buffers)	21.700mm
Overall height	3.895mm
Loading length	19.854mm
Loading width	2.430mm
Loading area	48m2
Loading capacity	113m3
Length of door openings (3 per side)	6.550mm
Height of door openings	2.200mm
Platform height	1.200mm
Tare weight	26.500 kgs
Payload ca.	53.500 kgs
Minimum curve	35 metres
Maximum speed	100 kph

Payload	A	B	C	
S	37.5	45.5	53.5	**

GE115CT

Habfis 1

Measurements in wall area (A – B)	
Height above wagon floor (mm)	Loading width (mm)
2.006	2.412
2.056	2.224
2.106	2.022
2.156	1.820
2.186	1.670
2.200	1.260
2.250	1.204
2.300	1.148
2.350	1.092
2.400	1.036
2.450	980
2.525	900
2.570	452

Measurements in roof support area (C – D)	
Height above wagon floor (mm)	Loading width (mm)
1.962	2.220
2.002	1.884
2.042	1.548
2.087	1.346
2.194	1.310
2.215	1.248

Habfis 1

48 Pallets (800x1200)

38 Pallets (1000x1200)

GE115CT

Habfis 1