
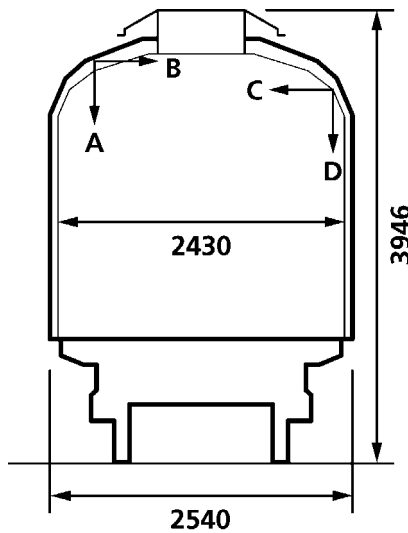


Wagon is RIV approved for mainland Europe and UK channel traffic, with the exception of Spain, Portugal and Finland.

2 sliding walls per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level.

Wagon has been designed for an even distribution of load on the wagon floor.

The maximum wheel pressure on the floor board is 5 tonnes.

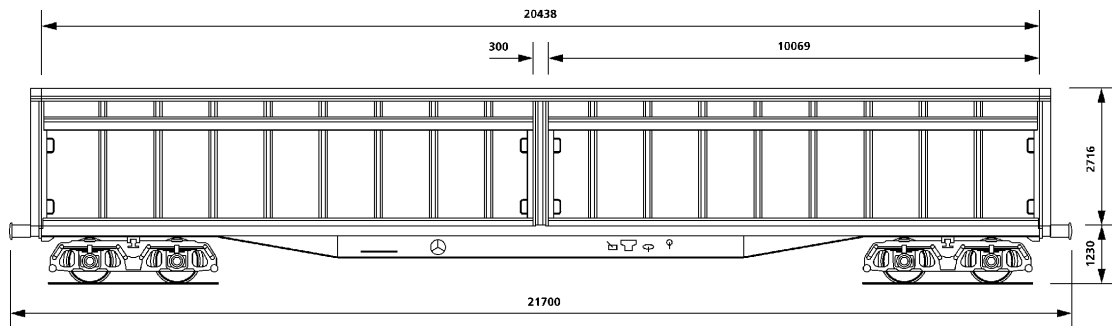

Wagon Data

Overall length (over buffers)	21.700mm
Overall height	3.946mm
Loading length	20.438mm
Loading width	2.430mm
Loading area	50m²
Loading capacity	116m³
Length of door openings (2 per side)	10.069mm
Height of door openings	2.400mm
Platform height	1.230mm
Tare weight	27.200 kgs
Payload ca.	52.800 kgs
Minimum curve	35 metres
Maximum speed	100 kph

Refer to separate table for height and width dimensions

Payload	A	B	C	
S	36.8	44.8	52.8	**

GE116CT

Habfis 2

Measurements in wall area (A - B)	
Height above wagon floor (mm)	Loading width (mm)
2.010	2.430
2.020	2.400
2.040	2.380
2.060	2.360
2.080	2.340
2.100	2.320
2.120	2.295
2.140	2.275
2.160	2.255
2.180	2.140
2.200	2.040
2.220	1.930
2.240	1.820
2.260	1.710
2.280	1.600
2.300	1.490
2.320	1.380
2.340	1.270
2.360	1.160
2.380	1.050
2.400	940

Measurements in roof support area (C - D)	
Height above wagon floor (mm)	Loading width (mm)
2.010	2.400
2.020	2.390
2.040	2.370
2.060	2.290
2.080	2.150
2.100	2.000
2.120	1.850
2.140	1.620
2.160	1.550
2.180	1.400
2.200	1.240
2.220	1.080
2.240	940
2.260	790

Habfis 2

51 Pallets (800x1200)

40 Pallets (1000x1200)

GE116CT

Habfis 2