



Wagon is RIV approved for mainland Europe and Finland.
 2 sliding hoods per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level but also loading/unloading from top by crane.
 Wagon has been designed for an even distribution of load on the wagon floor.
 The maximum wheel pressure on the floor board is 5 tonnes.
 Wagon is pre fitted for stansions and pockets to carry these.

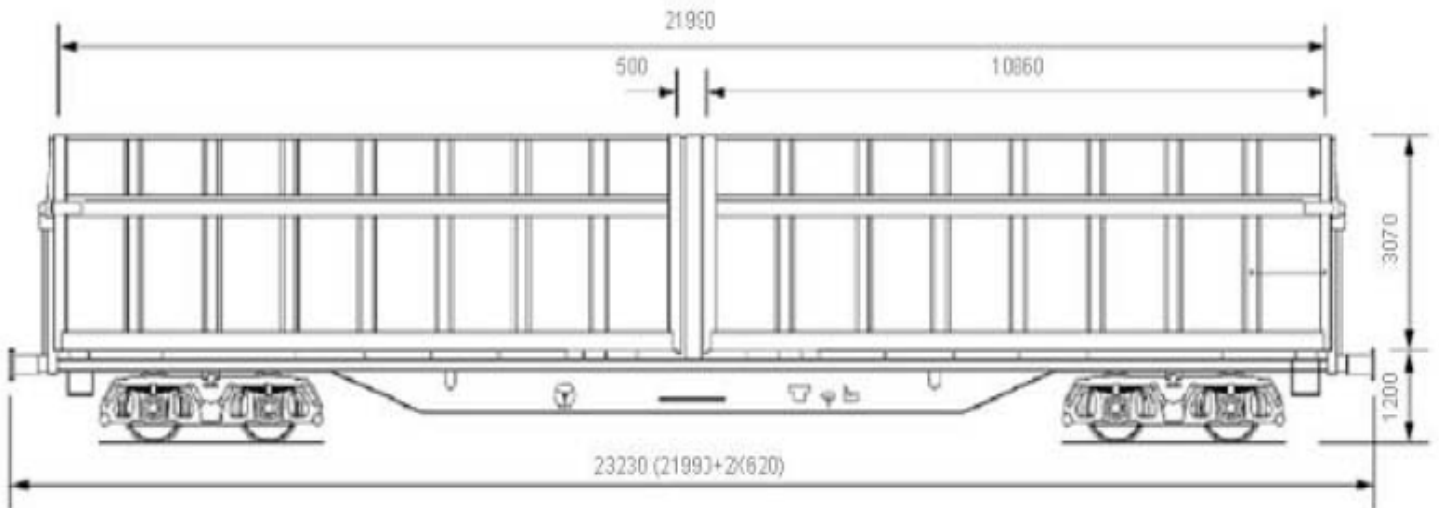

Wagon Data

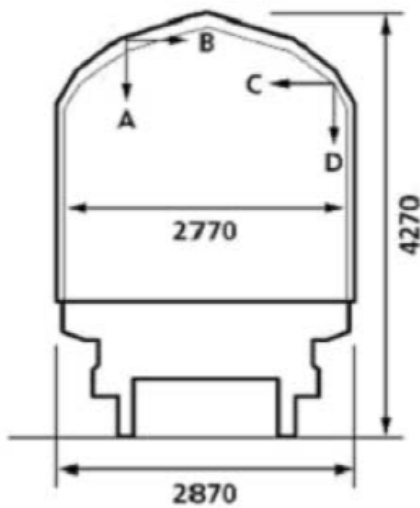

Overall length (over buffers)	23.230mm
Overall height	4.270mm
Loading length	21.990mm
Loading width	2.770mm
Loading area	60.6m ²
Loading capacity	165.5m ³
Length of hood aperture	10.740mm
Platform height	1.200mm
Tare weight	30.500 kgs
Payload (axle load 22.5 tonnes)	62.000 kgs
Minimum curve	75 metres
Maximum speed	100 kph

Refer to separate table for height and width dimensions

Measurements in hood area (A – B)	
Height above wagon floor (mm)	Loading width (mm)
1 2050	2770
2 2435	2390
3 2745	1770
4 2992	90

Payload	A	B	C	D	
S	33.5	41.5	49.5	59.5	**

