



Wagon is specially designed and therefore only authorized in some countries (please refer to attached list).

2 sliding hoods per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level but also loading/unloading from the top by crane.

Wagon has been designed for an even distribution of load on the wagon floor.

The maximum wheel pressure on the floor board is 5 tonnes.

Winches are also fitted to enable tensioned strap security.

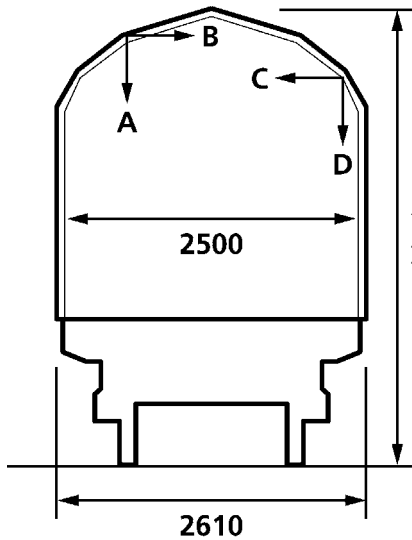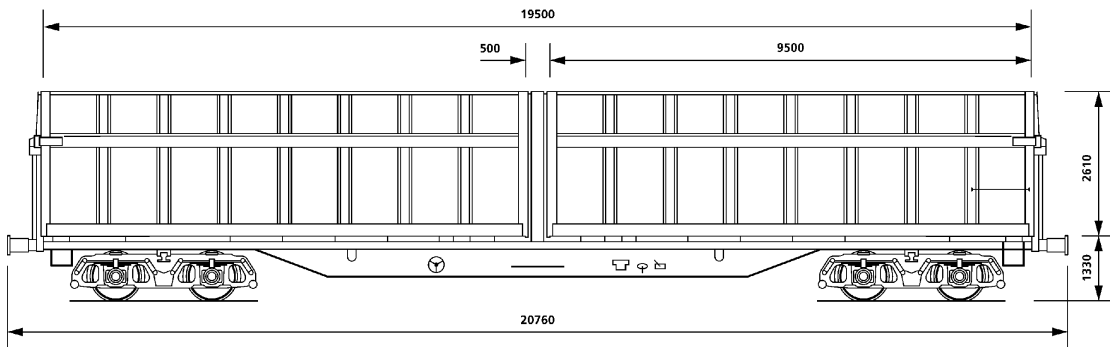

Wagon Data

<i>Overall length (over buffers)</i>	20.760mm
<i>Overall height</i>	3.940mm
<i>Loading length</i>	19.500mm
<i>Loading width</i>	2.500mm
<i>Loading area</i>	49m²
<i>Loading capacity</i>	112m³
<i>Length of hood aperture</i>	9.500mm
<i>Platform height</i>	1.330mm
<i>Tare weight</i>	26.500 kgs
<i>Payload (axle load 22.5 tonnes) ca.</i>	63.500 kgs
<i>Minimum curve</i>	50 metres
<i>Maximum speed</i>	100 kph

Refer to separate table for height and width dimensions

Payload	A	B	C	D	
S	37.5	45.5	55.5	63.5	**
120	0.00				

GE119CT

Sfins 1

Measurements in wall area (A – B)	
Height above wagon floor (mm)	Loading width (mm)
1.775	2.500
1.825	2.448
1.875	2.396
1.925	2.344
1.975	2.292
2.025	2.240
2.035	2.230
2.085	2.096
2.135	1.962
2.185	1.828
2.235	1.694
2.285	1.560
2.335	1.426
2.345	1.400
2.395	1.050
2.445	700
2.495	350
2.545	0

Measurements in roof support area (C – D)	
Height above wagon floor (mm)	Loading width (mm)
1.750	2.500
1.800	2.448
1.850	2.396
1.900	2.344
1.950	2.292
2.000	2.240
2.025	2.215
2.075	2.080
2.125	1.945
2.175	1.810
2.225	1.675
2.275	1.540
2.325	1.405
2.330	1.390
2.375	1.090

GE119CT

Sfins 1

Gattung	Wagennummern-Kreis	zugestimmte Bahnverwaltungen	Einschränkungen										
			1	2	3	4	5	6	7	8	9	10	
Sfins	83 80 474 1001-7 bis 1060-3	SZ,ZSR,HZ,MZ,JZ,EWS,CFL,CD,D SB,FS,MÄV,NS,NSB,PKP,											
		SBB,GC,SNCB,SNCF,ÖBB,TCDD											
	83 80 474 1061-1 bis 1110-6	CH,NSB,PKP,SNCF,NS,EWS,DSB, MÄV,SBB,CFL,GySEV,ÖBB,CD,G C,RAI,											
		SNCB,TCDD,FS,SZ											
	83 80 474 1111-4 bis 1159-3	SZ,BDZ,CH,GySEV,NSB,GC,EWS, CD,ÖBB,SNCB,CFL,JZ,SNCF,CFR											
		DSB,MÄV,RAI,FS,NS,SBB,HZ,PK P											

Achtung! : die Spalten 3, 7, 8 und 10 werden nicht im Vereinbarungsraaster angebracht !

- 1) With 22.5 Tons only 90 Km/h
- 2) GC only B Profile or less
- 3) Kehl-Strassbourg-Kehl
- 4) Not via Finland (VR) to Continent
- 5) Max axle 20t
- 6) Beladevorschriften
- 7) als außergewöhnliche Sendung
- 8) Ausnahmbeförderung nach ständiger Genehmigung TES 1304
- 9) keine 22,5 t
- 10) abgelehnt