
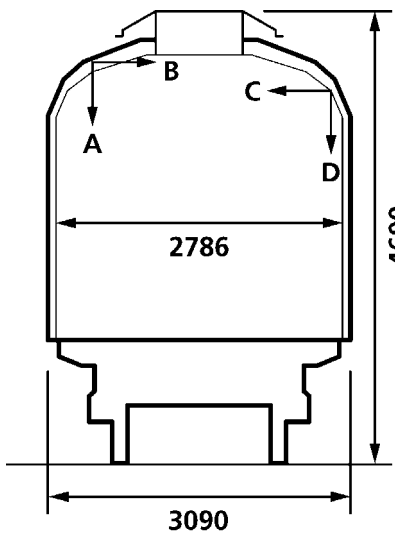


**Wagon is specially designed for high volume and therefore authorized in different countries (please refer to attached list).**

**2 sliding walls per wagon side give access to the complete floor area from both sides and facilitate the loading/unloading by fork lift truck from ground level.**

**Wagon has been designed for an even distribution of load on the wagon floor.**

**The maximum wheel pressure on the floor board is 5 tonnes.**

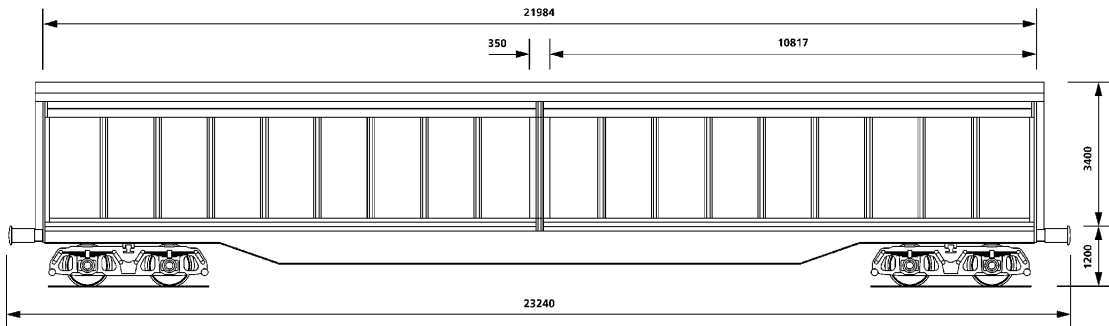

**Wagon Data**

<b>Overall length (over buffers)</b>	<b>23.240mm</b>
<b>Overall height</b>	<b>4.600mm</b>
<b>Loading length</b>	<b>21.984mm</b>
<b>Loading width</b>	<b>2.786mm</b>
<b>Loading area</b>	<b>61m2</b>
<b>Loading capacity</b>	<b>180m3</b>
<b>Length of openings (2 per side)</b>	<b>10.817mm</b>
<b>Height of door openings</b>	<b>3.100mm</b>
<b>Platform height</b>	<b>1.200mm</b>
<b>Tare weight ca.</b>	<b>28.500 kgs</b>
<b>Payload ca.</b>	<b>51.500 kgs</b>
<b>Minimum curve</b>	<b>35 metres</b>
<b>Maximum speed</b>	<b>100 kph</b>

Refer to separate table for height and width dimensions

<b>Payload</b>	<b>A</b>	<b>B</b>	<b>C</b>	
<b>S</b>	<b>35.5</b>	<b>43.5</b>	<b>51.5</b>	<b>**</b>
<b>120</b>	<b>0.00</b>			

**GE106**

**Habis 4**

<b>Measurements in wall area ( A – B )</b>	
<b>Height above wagon floor (mm)</b>	<b>Loading width (mm)</b>
2.310	2.786
2.360	2.727
2.410	2.669
2.460	2.610
2.510	2.551
2.540	2.516
2.590	2.433
2.640	2.349
2.690	2.266
2.740	2.183
2.790	2.099
2.840	2.016
2.890	1.933
2.940	1.849
2.990	1.766
3.040	1.683
3.050	1.666
3.100	1.491

<b>Measurements in roof support area ( C – D )</b>	
<b>Height above wagon floor (mm)</b>	<b>Loading width (mm)</b>
2.275	2.786
2.300	2.756
2.350	2.696
2.400	2.636
2.450	2.576
2.500	2.516
2.530	2.486
2.550	2.426
2.600	2.277
2.650	2.128
2.700	1.979
2.750	1.830
2.800	1.681
2.850	1.532
2.900	1.383
2.950	1.234
3.000	1.085
3.050	936
3.090	816

Habis 4

54 (800x1200)


42 Pallets (1000x1200)


**GE106**

**Habis 4**

Gattung	Wagennummern-Kreis	zugestimmte Bahnverwaltungen	Einschränkungen										
			1	2	3	4	5	6	7	8	9	10	
Habis 4	83 80 275 5326-5 bis 5350-5	CD,GySEV,PKP,MÁV,ÖBB,BDZ,T		GC						SNCF			FS,SBB
		CDD,CFL,DSB,NS,HZ, SZ,ZBH, ZSR											
	MZ,JZ												
	83 80 275 5351-3 bis 5375-2	CD,GySEV,PKP,MÁV,ÖBB,BDZ,T		GC						SNCF			
CDD,CFL,DSB,NS,HZ, SZ,ZBH, ZSR													
		MZ,JZ											

Achtung! : die Spalten 3, 7,8 und 10 werden nicht im Vereinbarungsraster angebracht !

- 1) With 22.5 Tons only 90 Km/h
- 2) GC only B Profile or less
- 3) Kehl-Strassbourg-Kehl
- 4) Not via Finland (VR) to Continent
- 5) Max axle 20t
- 6) Beladevorschriften
- 7) als außergewöhnliche Sendung
- 8) Ausnahmeförderung nach ständiger Genehmigung TES 1304
- 9) keine 22,5 t
- 10) abgelehnt